




# LIMBUS

REF	B2004	Limbus CW
	B2003	Limbus WW
	B2005	Limbus RGB
LED	3x CREE	
LED LM OUTPUT	67 lm	
POWER CONS.	6.7 W (RGB version 7.6 W)	
DRIVE VOLTAGE	24 Vdc	
COLOR TEMP.	WW 3.000 K CW 6.000 K RGB	
CRI	+80	
REFLECTOR	assymetrical lens 45° / 35° wall wash effect	
FINISH	stainless steel 316 frontring	
ADJUSTABLE	n/a	
CUT-OUT	Ø 103 mm	
REMARK	supplied with mounting sleeve and 0,5 m 2x1 mm <sup>2</sup> rubber connection cable max. load: exert force area 30 mm = 1.840 kg	

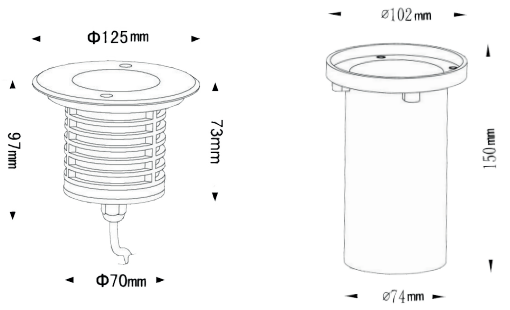

EG-FPC	cut out	floor/wall	in/outdoor	class 3	IP rating		